



TERAL LENS

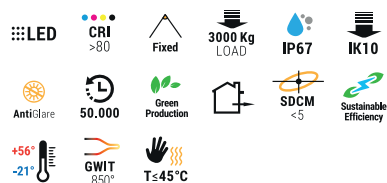

VOLTAGE

AC100-240V

DRIVER OPTIONS

OF On/Off
DL DALI
TR Triac
DX DMX512


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white
RGB


OPTIONAL

FINISHING: Silver

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41103004	4W	282 lm	8°/12°/20°/35°/45°	Ø 93	Ø 100 x 130 h
41105007	7W	506 lm	8°/12°/22°/36°/45°	Ø 119	Ø 130 x 145 h
41108014	14W	937 lm	8°/12°/22°/45°	Ø 145	Ø 160 x 155 h

Italy Teral Lens unisce design moderno e funzionalità eccezionale, perfetto per illuminare spazi esterni con precisione. Dotato di una lente ad alte prestazioni, questo faretto dirige la luce in un fascio concentrato, ideale per mettere in risalto aree specifiche o creare effetti di illuminazione drammatici. Realizzato in alluminio pressofuso, è progettato per resistere alle condizioni atmosferiche più difficili, offrendo un'illuminazione efficiente e duratura. Il suo design elegante e minimale si integra perfettamente in qualsiasi paesaggio, rendendolo una soluzione di illuminazione versatile e affidabile.

Alloggiamento: Alluminio pressofuso con copertura in acciaio inossidabile

Diffusore: vetro temperato trasparente

LED: Tecnologia LED avanzata (L80/B10/F10), con una durata di 50.000 ore e prestazioni affidabili a temperature comprese tra -21°C e 56°C.

UK Teral Lens combines modern design with exceptional functionality, perfect for lighting outdoor spaces with precision. Featuring a high-performance lens, this luminaire directs the light in a focused beam, ideal for accentuating specific areas or creating dramatic lighting effects. Crafted from die-cast aluminum, it is built to endure harsh weather conditions while providing efficient, long-lasting illumination. Its sleek, minimalist design integrates seamlessly into any landscape, making it a versatile and reliable lighting solution.

Housing: Die-cast aluminum with stainless steel cover

Diffuser: transparent tempered glass

LED: Advanced LED technology (L80/B10/F10), with a 50,000-hour lifespan and reliable performance in temperatures from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

