


TETRA

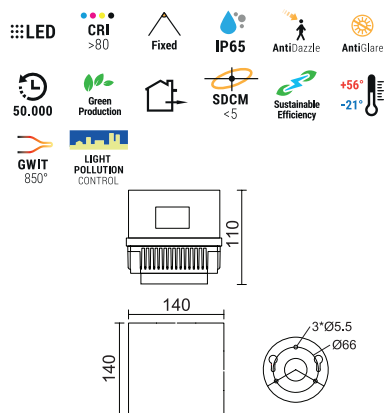

VOLTAGE

AC220-240V

DRIVER OPTIONS

OF On/Off


CCT OPTIONS

2700K Warm white
 3000K Warm white
 4000K Neutral white
 6000K Cool white


OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION

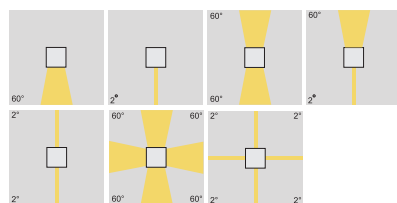

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41224003	3W	24 lm	2° down	140 x 140 x 110 h
41223003	3W	24 lm	60° down	140 x 140 x 110 h
41227006	6W	120 lm	2° up - 2° down	140 x 140 x 110 h
41226006	6W	200 lm	60° up - 2° down	140 x 140 x 110 h
41225006	6W	90 lm	60° up - 60° down	140 x 140 x 110 h
41229011	11W	260 lm	2° x 4 sides	140 x 140 x 110 h
41228011	11W	190 lm	60° x 4 sides	140 x 140 x 110 h

Il faretto da facciata Tetra combina materiali di alta qualità e tecnologia avanzata, progettato per applicazioni di illuminazione specifiche. Con prestazioni superiori e un design elegante, è ideale per migliorare gli esterni degli edifici.

Alloggiamento: Alluminio pressofuso

Diffusore: Vetro temperato, che garantisce una distribuzione ottimale della luce, resistendo agli urti e alle condizioni ambientali.

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10), che offre una durata straordinaria di 50.000 ore e un funzionamento affidabile in temperature comprese tra -21°C e 56°C, garantendo prestazioni efficienti e riducendo il consumo energetico.

The Tetra facade light combines high-quality materials and advanced technology, designed for specific lighting applications. With its superior performance and stylish design, it is ideal for enhancing building exteriors.

Housing: Die-cast aluminum

Diffuser: Tempered glass, ensuring optimal light diffusion while withstanding impacts and environmental factors.

LED: Energy-efficient LED technology (L80/B10/F10), delivering a remarkable 50,000-hour lifespan and reliable operation in temperatures ranging from -21°C to 56°C, ensuring efficient performance and reduced energy consumption.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

