




TITO



VOLTAGE
DC24V

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
IV 1/10V dimming	3000K Warm white
	4000K Neutral white
	5000K Cool white
	6500K Cool white
	RGB

OPTIONAL
FINISHING: Silver

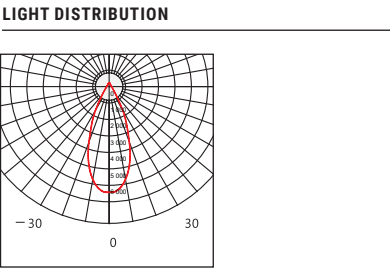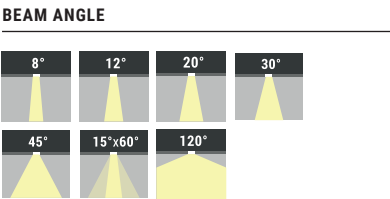

COMPLIANCE
LM-79 TM-21 LM-80



COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	HOLE (mm)	SIZE (mm)
41177002	1.5W	1pc	113 lm	single	8°/12,5°/20°/30°/45°/120°	Ø65	Ø75 x 88 h
41179002	1.5W	1pc	113 lm	RGB	8°/12,5°/20°/30°/45°/120°	Ø65	Ø75 x 88 h

IT Tito è una luce di dimensioni contenute ma altamente resistente, progettata per offrire prestazioni affidabili sia in ambienti urbani che in condizioni difficili all'aperto. Costruito per durare, resiste facilmente a carichi pesanti e a condizioni climatiche estreme. Il LED ad alta efficienza garantisce un utilizzo minimo di energia, offrendo al contempo un'illuminazione costante e affidabile.

Alloggiamento: Realizzato in alluminio con una copertura in acciaio inox resistente alla corrosione, disponibile nelle finiture 309 e 316.

Diffusore: Diffusore in vetro temperato.

LED: Dotato di tecnologia LED avanzata con prestazioni L80/B10/F10, con una durata di 50.000 ore e prestazioni affidabili in un intervallo di temperature da -21°C a 56°C.

UK Tito is a small yet highly resilient light, engineered to perform reliably in both urban and harsh outdoor settings. Built for longevity, it withstands heavy stresses and extreme weather conditions with ease. The energy-efficient LED ensures minimal power use while delivering consistent and dependable illumination.

Housing: aluminium with a stainless steel cover, available in both 309 and 316 trims.

Diffuser: High-quality tempered glass diffuser.

LED: Features advanced LED technology with L80/B10/F10 ratings, offering an impressive 50,000-hour lifespan and reliable performance across temperatures from -21°C to 56°

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

