
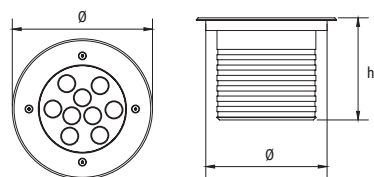


TRAIANO ADJ

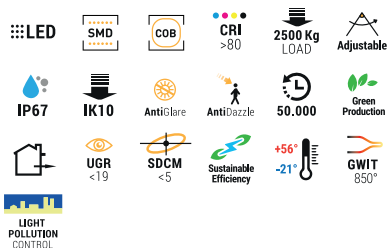

VOLTAGE

AC100-305V / DC24V

DRIVER OPTIONS

OF On/Off
IV 1/10V dimming
DX DMX512

OPTIONAL

FINISHING: Silver


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGBW / RGB




COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	HOLE (mm)	SIZE (mm)
41176060	60W	24pcs	6600 lm	single	3,5°/6°/12°/20°/30°/45°/60°/10x70	Ø301	Ø330 x 260 h
41176042	42W	24pcs	4620 lm	single	3,5°/6°/12°/20°/30°/45°/60°/10x70	Ø301	Ø330 x 260 h
41176032	32W	10pcs	2400 lm	single	3,5°/6°/12°/20°/30°/45°/60°/10x70	Ø235	Ø260 x 196 h
41176016	16W	7pcs	1200 lm	single	3,5°/6°/12°/20°/30°/45°/60°/10x70	Ø185	Ø210 x 160 h
41176008	8W	1pc	600 lm	single	25° tilt.10°	Ø118	Ø130 x 115 h
41176006	6W	1pc	450 lm	single	25° tilt.10°	Ø96	Ø110 x 96 h
41177100	100W	12pcs	4500 lm	RGBW	15°/20°/30°/15x60°	Ø301	Ø330 x 260 h
41177014	14W	6pcs	630 lm	RGB	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø185	Ø210 x 160 h

BEAM ANGLE

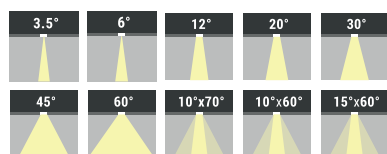

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy: Traiano Adj è progettato per migliorare gli spazi esterni, offre una soluzione LED elegante ed efficiente dal punto di vista energetico con requisiti minimi di manutenzione. Realizzato per resistere agli agenti atmosferici, questo apparecchio è costruito per un uso a lungo termine.

Alloggiamento: Alluminio pressofuso con una robusta copertura in acciaio inossidabile nelle finiture 309 e 316

Diffusore: Vetro temperato trasparente

Accessori: Include una scatola in PVC per un fissaggio stabile e sicuro al suolo.

LED: Tecnologia LED avanzata che riduce il consumo energetico (L80/B10/F10) con una durata impressionante di 50.000 ore, funzionando a temperature comprese tra -21°C e 56°C.

UK: Traiano Adj is designed to enhance outdoor spaces, it offers a sleek, energy-efficient LED solution with minimal maintenance requirements. Crafted for durability, this fixture is built to withstand the elements for long-term use.

Housing: Die-cast aluminum with a robust stainless steel cover in 309 and 316 trim

Diffuser: Transparent tempered glass

Accessories: Includes a PVC box for secure and stable ground fixing.

LED: Advanced LED technology ensures reduced energy consumption (L80/B10/F10) with an impressive 50,000-hour lifespan, capable of operating in temperatures from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

