
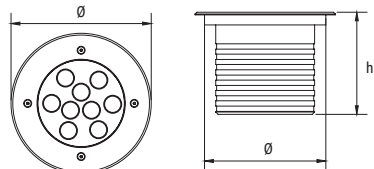


TRAIANO

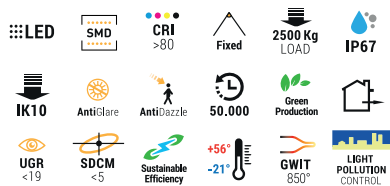

VOLTAGE

AC100-240V / DC24V

DRIVER OPTIONS

OF On/Off
IV 1/10V dimming
DX DMX512


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGBW / RGB


OPTIONAL

FINISHING: Silver

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	HOLE (mm)	SIZE (mm)
41173072	72W	36pcs	4680 lm	single	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø301	Ø300 x 260h
41174056	56W	24pcs	3640 lm	single	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø301	Ø280 x 240h
41174040	40W	16pcs	2600 lm	single	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø235	Ø215 x 208h
41174030	30W	8pcs	1950 lm	single	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø235	Ø185 x 188h
41174016*	16W	4pcs	1200 lm	single	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø140	Ø135 x 139h
41174007*	7W	16pcs	525 lm	single	8°/12,5°/20°/30°/45°/60°	Ø118	Ø215 x 208h
41174004*	4W	8pcs	263 lm	single	8°/12,5°/20°/30°/45°/60°	Ø96	Ø185 x 188h
41175072	72W	9pcs	3240 lm	RGBW	15°/20°/30°/15x60°	Ø235	Ø260 x 235h
41175040	40W	24pcs	1800 lm	RGB	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø235	Ø260 x 195h
41175030	30W	24pcs	1350 lm	RGB	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø235	Ø260 x 146h
41175016	16W	9pcs	720 lm	RGB	8°/12,5°/20°/30°/45°/60°/15x30°/10x60°	Ø140	Ø150 x 118h
41175007	7W	6pcs	315 lm	RGB	8°/12,5°/20°/30°/45°/60°	Ø118	Ø130 x 115h
41175004	4W	3pcs	158 lm	RGB	8°/12,5°/20°/30°/45°/60°	Ø96	Ø110 x 96h

*On/off: AC100-240V/DC24V; DMX512: Only DC24V

Traiano è un faretto interrato LED sofisticato, progettato per aggiungere un tocco di eleganza e funzionalità agli spazi esterni. Che venga posizionato lungo i vialetti, nei giardini o come parte del paesaggio architettonico, offre un fascio di luce pulito e nitido, illuminando in modo efficiente i sentieri o gli elementi decorativi.

Alloggiamento: Alluminio pressofuso con una copertura in acciaio inossidabile, disponibile nelle finiture 309 e 316

Diffusore: Vetro temperato trasparente

Accessori: Include una scatola in PVC per un fissaggio sicuro al suolo

LED: La tecnologia LED a ridotto consumo energetico con classificazione L80/B10/F10. Durata: 50.000 ore. Temperatura di esercizio da -21°C a 56°C.

Traiano is a sophisticated LED in-ground luminaire, designed to bring a touch of elegance and practicality to your outdoor spaces. Whether placed along walkways, in gardens, or as part of architectural landscaping, it offers a clean and sharp beam of light, efficiently illuminating paths or decorative elements.

Housing: Die-cast aluminum with a stainless steel cover, available in both 309 and 316 trims

Diffuser: Transparent tempered glass

Accessories: Comes with a PVC box for secure ground fixing

LED: LED technology reduces energy consumption with an L80/B10/F10 rating. 50,000-hour lifespan. Temperature range of -21°C to 56°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

