


VALET WR1

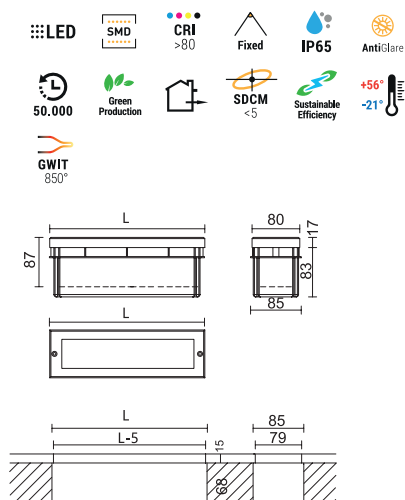

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41405010	10W	484 lm	Asymmetric	185 x 80 x 100 h
41405012	12W	771 lm	Asymmetric	230 x 80 x 100 h
41405014	14W	853 lm	Asymmetric	260 x 80 x 100 h


OPTIONAL

FINISHING: Black

BEAM ANGLE




LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

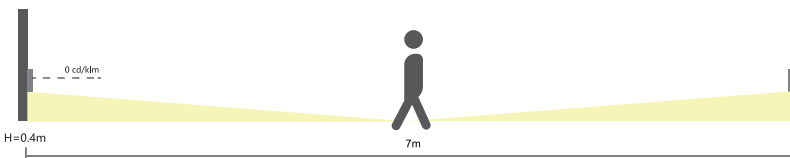

VALET è una lampada da incasso a parete realizzata con materie prime di alta qualità. Questa caratteristica consente al prodotto di essere estremamente protetto da acqua, umidità, polvere, corpi estranei in generale e condizioni meteorologiche difficili. Il LED è un sistema ad alta efficienza, che fornisce un elevato flusso luminoso a bassi consumi. Per questo motivo l'articolo è molto professionale e importante in termini di risparmio energetico e salvaguardia dell'ambiente.

Alloggiamento: alluminio con possibilità personalizzazione colore RAL

Diffusore: policarbonato opalino

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperatura di lavoro da -21°C a 56°

VALET is a wall recessed light made of high quality raw materials. This feature permits to the item to be extremely protect against water, humidity, dust, extraneous corps in general and hard weather conditions. The LED is a high efficiency system, which provides high luminous flux level in low consumptions. For this reason the item is very professional and important in a matter of energy savings and environmental safety.

Housing: die cast aluminium powder coated with choice of RAL colour

Diffuser: polycarbonate opal diffuser

LED: reducy energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

