



VELIS TL1

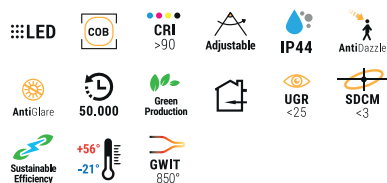

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac
PH Phase dimming

CCT OPTIONS

3000K Warm white
4000K Neutral white


COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41701012	12W	1209 lm	15°/24°/36°/55°	Ø 60 x 170 x 146 h
41702020	20W	1954 lm	15°/24°/36°/55°	Ø 72 x 175 x 158 h
41703030	30W	2738 lm	15°/24°/36°/55°	Ø 80 x 180 x 166 h
41704034	34W	3147 lm	15°/24°/36°	Ø 94 x 180 x 180 h

OPTIONAL


FINISHING: Black

ACCESSORIES: 3 circuits
 2 circuits
 Single circuit

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Velis TL1 è progettato per flessibilità e estetica moderna, il Velis TL1 è disponibile in diverse configurazioni, tra cui opzioni da montare su binario o a superficie. Perfetto per l'illuminazione d'accento o generale, questo apparecchio eccelle in efficienza energetica e comfort visivo, rendendolo ideale per ambienti diversificati.

Alloggiamento: Realizzato in alluminio pressofuso

Riflettore: Alluminio anodizzato

Diffusore: Opzioni di diffusore in vetro trasparente o PMMA

LED: Tecnologia LED avanzata (L80/B10/F10), con una durata di 50.000 ore, che garantisce prestazioni affidabili a temperature comprese tra -21°C e 56°C.

Velis TL1 is designed for flexibility and modern aesthetics, the Velis TL1 is available in various configurations, including track-mounted and surface-mounted options. Ideal for both accent and general lighting, this luminaire excels in energy efficiency and visual comfort, making it perfect for diverse environments.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

Diffuser: Transparent glass or PMMA

LED: Advanced LED technology (L80/B10/F10), offering a 50,000-hour lifespan, with reliable performance in temperatures from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

