



VIA L

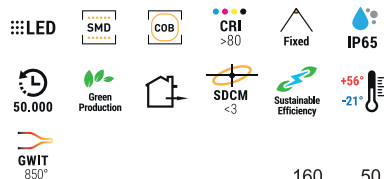

VOLTAGE

AC100-240V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white




OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



■ Via L apparecchio con un design contemporaneo, disponibile in due dimensioni, che porta eleganza e bellezza in ogni ambiente. La sua luce uniforme, pulita e soffusa crea un'atmosfera accogliente e stilosa. Grazie alla tecnologia LED avanzata, l'apparecchio garantisce ottime prestazioni luminose, massimizzando l'efficienza energetica. Ideale per giardini, parchi, piccole piazze o sentieri.

Alloggiamento: realizzato in alluminio pressofuso e verniciato a polvere con una selezione di colori RAL, questo apparecchio combina resistenza e una finitura moderna ed elegante.

Diffusore: il diffusore in PMMA policarbonato, progettato appositamente per LED, offre una distribuzione uniforme della luce e un'illuminazione morbida e ambientale.

LED: con tecnologia LED avanzata, l'apparecchio riduce il consumo energetico (L80/B10/F10) e vanta una durata impressionante di 50.000 ore, funzionando affidabilmente in temperature che vanno da -21°C a 56°C.

■ Via L a luminaire with a contemporary design, available in two sizes, bringing elegance and beauty to any space. Its clean, uniform, and soft light output creates a welcoming and stylish ambiance. With advanced LED technology, the luminaire ensures optimal lumen performance while maximizing energy efficiency. Perfect for use in gardens, parks, small plazas, or pathways.

Housing: crafted from die-cast aluminum and powder-coated with a selection of RAL colors, this fixture combines strength with a sleek, modern finish.

Diffuser: the PMMA polycarbonate diffuser is designed specifically for LED, offering even light distribution and a pleasant, ambient glow.

LED: with advanced LED technology, this luminaire reduces energy consumption (L80/B10/F10) and has an impressive 50,000-hour lifespan, performing reliably in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

