



VIRGA

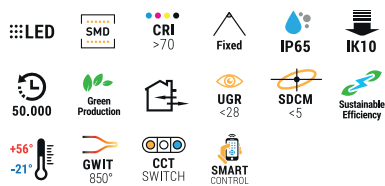

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

3000K Warm white
4000K Neutral white
5000K Cool white
CCT Changeable

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
40401200	200W	30000 lm	60°/80°/120°	Ø365 x 178 h


OPTIONAL

FINISHING: White


ACCESSORIES: Smart control system

MOUNTING: Loop / Ceiling

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Human centric lighting Con Virga è possibile gestire il colore e l'intensità delle nostre luci in base alle esigenze specifiche di ogni momento, per adattarsi alla luce solare naturale durante tutto il giorno. Controlla la luce. Tutti i dispositivi possono essere controllati remotamente in gruppo tramite l'app Tuya su smartphone senza alcun telecomando esterno. 0-100% di luminosità regolabile e sintonizzabile simultanea CCT 3000k-5000k.

Alloggiamento: alluminio pressofuso

Diffusore: lenti in policarbonato

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperature di lavoro da -21°C a 56°

Human centric lighting. With Virga it is possible to manage the colour and intensity of our lights according to the specific needs of each moment, to match natural sunlight throughout the day. Light Under Control. All lights can be group controlled, and all the necessary operations for remote control of lights take place through a Tuya App on a smartphone, without any external remote controller. 0-100% brightness adjustable and simultaneous tunable CCT 3000k-5000k.

Alloggiamento: die cast aluminium

Diffusore: PMMA lens

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

