
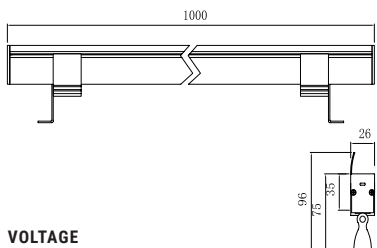


VISIO

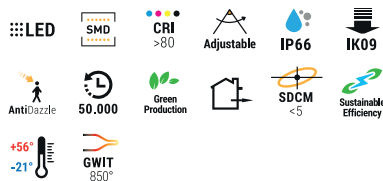

VOLTAGE

AC100-240V 50/60HZ

DRIVER OPTIONS

OF On/Off
DX DMX512


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white
RGB
RGBW


OPTIONAL

FINISHING: White

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	L.COLOUR	SIZE (mm)
41240014	14W	1080 lm	30°/10°x60°	single/RGB/RGBW	1000 x 23 x 20 h
41245030	30W	2452 lm	30°/10°x60°	single/RGB/RGBW	1000 x 45 x 90 h

Visio è progettato per offrire prestazioni superiori con un robusto corpo in alluminio aeronautico, garantendo una dissipazione del calore eccezionale e una durata straordinaria. Dotato di angolo di proiezione regolabile, offre soluzioni di illuminazione flessibili per varie applicazioni esterne. Il vetro temperato ultra-bianco e la lente PMMA ad alta efficienza migliorano l'emissione della luce e assicurano una chiarezza durevole. Con un rivestimento elettrostatico anticorrosivo e viti e piastre di montaggio in acciaio inossidabile, questo apparecchio è progettato per resistere a condizioni ambientali difficili. È disponibile un trattamento superficiale speciale per applicazioni costiere.

Alloggiamento: Alluminio estruso

Diffusore: Vetro temperato trasparente

Riflettore: Lente ottica

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10), con una durata di 50.000 ore, che funziona efficacemente a temperature comprese tra -21°C e 56°C, garantendo risparmi energetici e affidabilità a lungo termine.

The Visio LED floodlight is engineered for superior performance with a robust aviation-grade aluminum body, ensuring exceptional heat dissipation and durability. Designed with an adjustable projection angle, it provides flexible lighting solutions for various outdoor applications. The ultra-white tempered glass and high-efficiency PMMA lens enhance light output and ensure long-lasting clarity. With anticorrosive electrostatic powder coating and stainless steel screws and mounting plates, this fixture is built to withstand harsh environments. Special surface treatment is available for coastal applications.

Housing: Extruded aluminum

Diffuser: Transparent tempered glass

Reflector: Optical lens

LED: Energy-efficient LED technology (L80/B10/F10), with a 50,000-hour lifespan, operating effectively in temperatures ranging from -21°C to 56°C

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

