

Installation instructions


PRESTIGE QUADRO



Outdoors



IP Rating



Glass Replacement



100-240V.AC










LED Lifetime 50,000



Product introduction

- Aluminum reflector with high reflection.
- The regional special lighting columns.
- AkzoNobel UV resistant polyester powder coating.
- High intensity tempered glass.
- All screws exposed in SS grade.

Dimension drawing

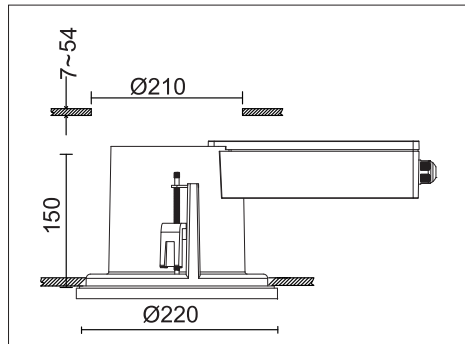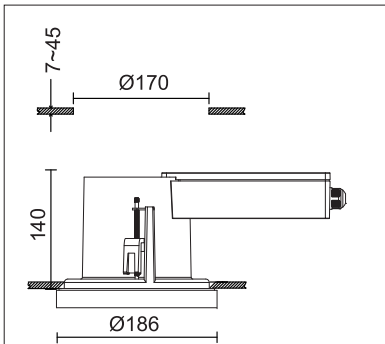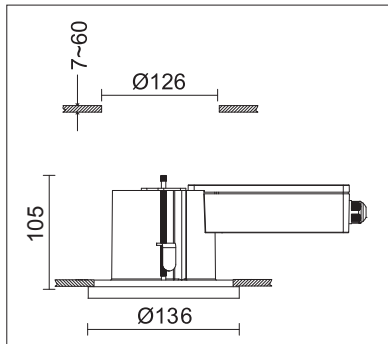


Attention

- Check the input voltage carefully before power on.
- The installation and disassembly must be operated by a professional technician.
- When you open the package, please check if there are signs of serious damage to the lamps.
- Switch off main power when do installation or connection in case of electric shock.
- This product can only be installed in dry or sunny weather.
- Do not remove or replace the original parts, or water leakage may be caused and lighting efficiency will be affected.
- Replace the glass immediately if it gets broken.
- IP67.The installation and wiring connection can' t be in a pool or area with water long time.
- The joint of wiring connection between products and main power must be waterproofed properly.
- LED lighting products can not be in a same circuit with MH, Sodium products or electromotor.
- The product is suggested not be installed near seaside or the environment with high corrosion elements, otherwise, the product may get corrosion or rusted.
- Steel rope is provided as accessory and need to be fixed tightly in a safe position to hold on the fixture. ET won't be responsible for the accident caused by neglect of rope fixing.

Installation requirements

- Open the package, take the fixture and installation manual out. <see image 1>.
- Remove the cover from the cover by rotating the cover.
- Connected the wiring of fixture with main power which should be prepared well when dig the installation hole. <see image 2>
- Fix the steel rope tightly in a safe position to hold on the fixture in case of drop. <This step is needed and necessary> <see image 2>
- After rope fixing and wiring connection, put the fixture to it's pre-digged hole, screw the mounting bracket and ensure it's supported by ceiling.
- The outside cover is rotated and the lamp body surface cover in the steps of bayonet lamp body bottom. <see image 3>
- The diagram below is a typical one of this whole range.

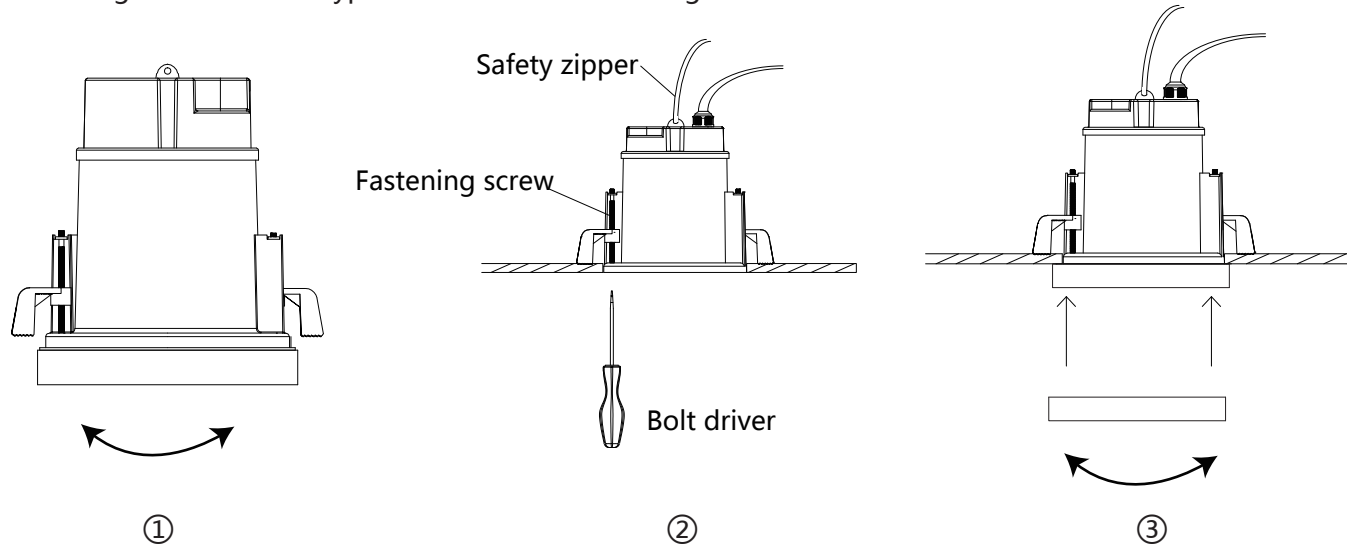

The Manual only tells the installation steps and attentions, DMX and the related control system may need different and professional direction.