


Installation instructions

SPILLO

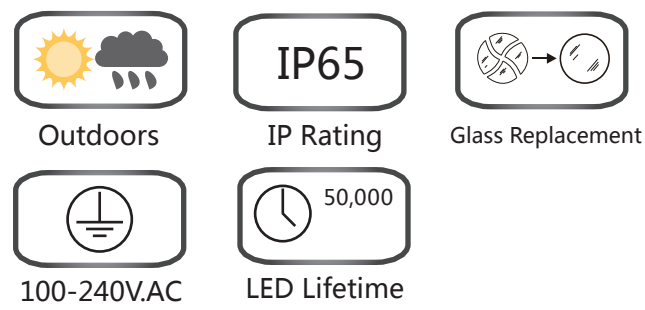


Product introduction

- UV resistant polyester powder coating.
- High intensity tempered glass.
- All screws exposed in SS grade.



Dimension drawing

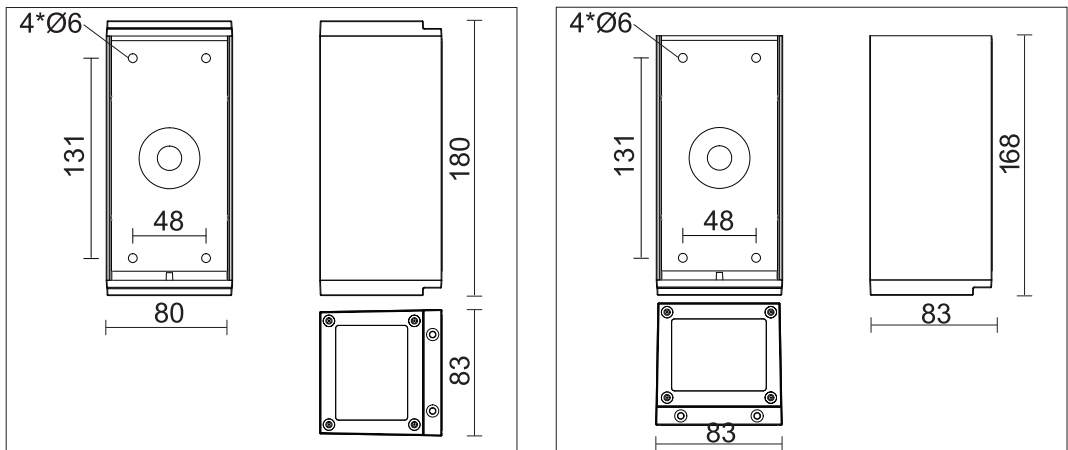

Matters needing attention

- Before the lamp is connected, please carefully check the input voltage, so as not to cause damage to the lamp.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the lamps.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- This product can only be installed in dry or sunny weather.
- Can not remove the original structure, to avoid leakage of light.
- Glass with waterproof and dust, such as the discovery of broken glass, please replace the glass in a timely manner.
- Waterproof grade IP65 lamps, lamps shall not be installed in the low-lying or long-term water, electrical boxes need to be higher than the surface.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Please choose according to product appearance specifications corresponding to the power supply, power cable, not led lamp and metal halide lamp, sodium lamp and motor share a power supply circuit.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.

Installation requirements

- Open the package, take fixture and installation manual out.
- Remove the mounting plate from fixture with cross screwdriver and keep all screws well.
- Pull the prepaid wiring of main power supply out through the hole on mounting plate, fix the plate on the wall tightly. <see image 1>
- Take note of the sticker<which tells up and down lighting>on fixture and mount accordingly.
- Connect the prepared wiring with fixture's, after connection, fix the housing to mounting plate with screws. <see image 2>
- Ensure all screws are screwed tightly in case of falling. <see image 3>

