

Installation instructions


VIA



Outdoors



IP65



PC Replacement



100-240V.AC




LED Lifetime 50,000



Product introduction

- Column housing for illumination of walkways, entrances and access roads.
- LED module.
- UV resistant polyester powder coating.

Dimension drawing

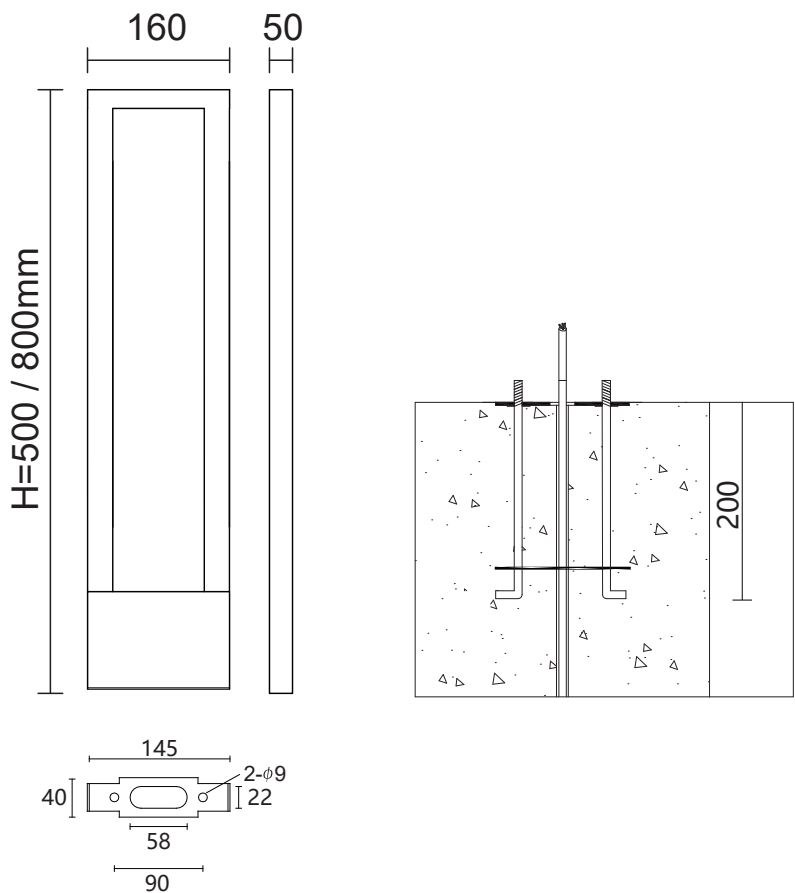

Matters needing attention

- Before the lamp is connected, please carefully check the input voltage, so as not to cause damage to the lamp.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the lamps.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- This product can only be installed in dry or sunny weather.
- Can not remove the original structure, to avoid leakage of light.
- Glass with waterproof and dust, such as the discovery of broken glass, please replace the glass in a timely manner.
- Waterproof grade IP65 lamps, lamps shall not be installed in the low-lying or long-term water, electrical boxes need to be higher than the surface.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Please choose according to product appearance specifications corresponding to the power supply, power cable, not led lamp and metal halide lamp, sodium lamp and motor share a power supply circuit.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.

Installation requirements

- Open the package, take out lamps and accessories bags,Pre installation of anchor bolts.
- The power line shall be reserved to connect with the lamps according to the installation position.

When installing the fixed plate on site, the power line shall pass through the wire hole area (①) .

- After the power line is connected, light up the test, and then put the lamp body on the mounting base plate. The connection of the power line needs to ensure the waterproof performance of IP68 (②) .

- Closely fit the lamp body with the mounting base to ensure that the lamp is horizontal, align with the external fixing hole of the lamp body, and fix the lamp body on the mounting base plate (③) .

