

Installation instructions

VIAGGIO



Outdoors



IP Rating



Glass Replacement



24VDC



LED Lifetime






Technical Data

Voltage	Lamp	Power
24VDC	LED	3W
24VDC	LED	7W
24VDC	LED	12W

Product introduction

- High performance transmitting resin.
- Can be customized for different sizes and power.
- Akzo Nobel UV resistant polyester powder coating.
- PMMA high performance transparent cover.
- Stainless steel housing.

Dimension drawing

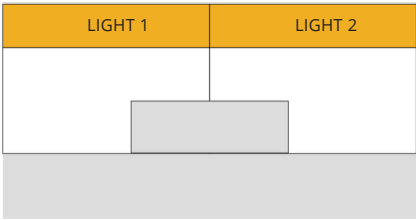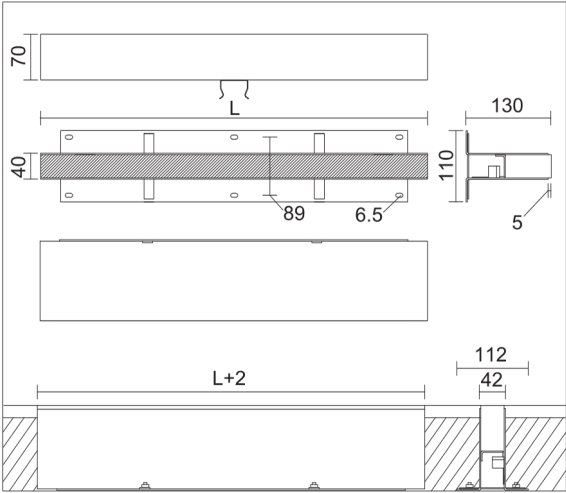


Attention


- Before the lamp is connected, please carefully check the input voltage, so as not to cause damage to the lamp.
- The installation and removal of lamps require professional technical personnel to operate.
- When you open the package, please check if there are signs of serious damage to the lamps.
- When connected, please cut off all lighting fixtures to connect the power supply, so as not to get an electric shock.
- This product can only be installed in dry or sunny weather.
- Can not remove the original structure, to avoid leakage of light.
- Glass with waterproof and dust, such as the discovery of broken glass, please replace the glass in a timely manner.
- Waterproof grade IP68, buried lamp installation area to do an effective waterproof layer, to avoid long-term immersion in water.
- Lighting outlet and on-site power supply cable connection needs to do IP68 protection level, so as not to affect the normal operation of the lamp.
- Please choose according to product appearance specifications corresponding to the power supply, power cable, not led lamp and metal halide lamp, sodium lamp and motor share a power supply circuit.
- Lamps are not recommended to be installed on the beach and corrosive chemical areas, so as not to cause corrosion of lamps and lanterns led to light damage.
- Please refer to the stainless steel maintenance instructions for the maintenance of the stainless steel ring.

Installation requirements

- Open the package, take the fixture, preinstall box, accessory and Installation instructions.
- Mount the preinstall box well and keep the surface of box 5mm lower than ground or floor, which will make the surface of housing in same level with ground or floor.
- Do not throw away the styrofoams which used to prevent the preinstall box from out of shape when you fix it with concrete. (See image ①)
- The joint of wiring connection between products and main power supply should be waterproofed completely.
- After connection, switch on the power and see if all lights work well and then fix the lighting housing to preinstall box in case of any unexpected problems.
- After checking, put the light to it's preinstall box, align their springs and fix them tightly. (See image ②)

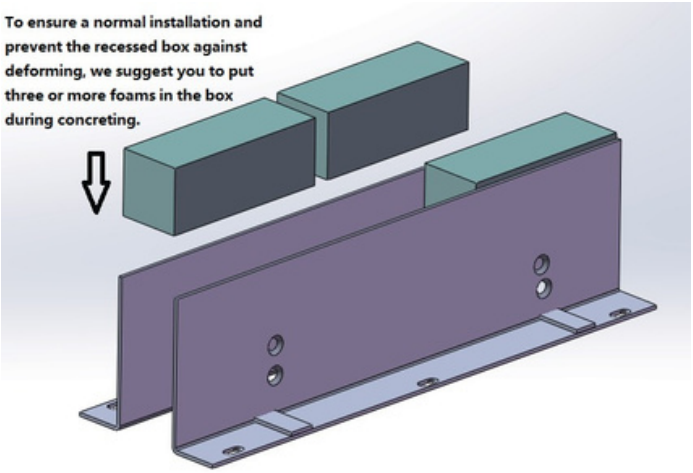

①

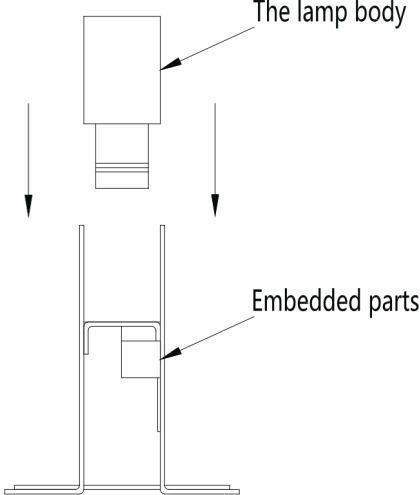

②